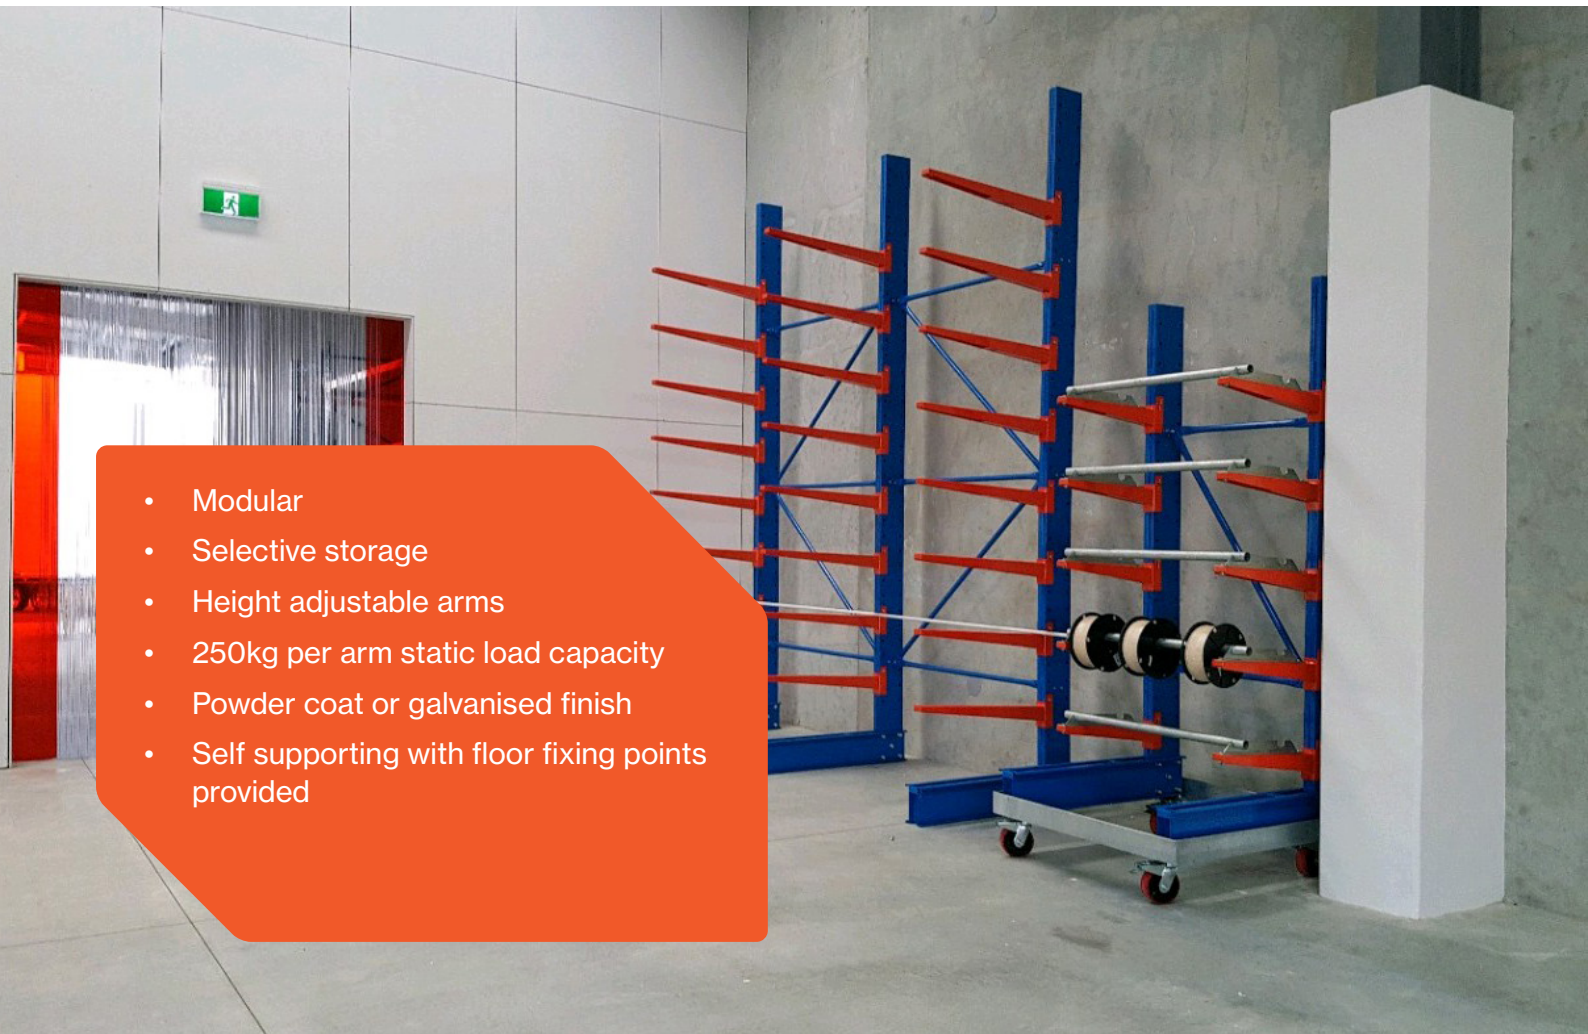


MEDIUM DUTY CANTILEVER RACKING

- 
- A photograph of a warehouse interior featuring several units of medium-duty cantilever racking. The racks are constructed from blue vertical posts and red horizontal arms. One unit is mounted on a silver metal cart with four red wheels. The racks are positioned against a light-colored wall, and a white rectangular pillar is visible on the right. An orange callout box is overlaid on the left side of the image, containing a list of features.
- Modular
 - Selective storage
 - Height adjustable arms
 - 250kg per arm static load capacity
 - Powder coat or galvanised finish
 - Self supporting with floor fixing points provided


Medium Duty Cantilever racking offers selectable storage for long length product ensuring your stock is protected from damage while efficiently maximising your warehouse space. Available in single or double sided, a range of heights and post spacings and with either 600mm or 900mm arms this modular system is super sturdy and completely self-supporting. Each arm has a safe working load of 250kg and can be adjusted to any height in 100mm increments. Typically used for storing aluminium extrusions, conduits, railings and timber, the system is very simple to assemble and there is a galvanised option for outdoor storage.

MEDIUM DUTY CANTILEVER RACKING SPECIFICATIONS

POST HEIGHT	POST SPACING	ARM LENGTH	FINISH	CAPACITY
2000, 3000, 4000mm	900, 1500mm	600, 900mm	Powder coat, Galvanised	250kg per Arm

Custom sizes, colours and capacity available on indent order.
 Shelf capacities are indications only. The actual capacity may vary. An engineer's assessment of your shelf configuration and ground conditions are required to establish actual capacity. Please contact us if you wish to obtain an assessment.

EXPLODED DIAGRAM

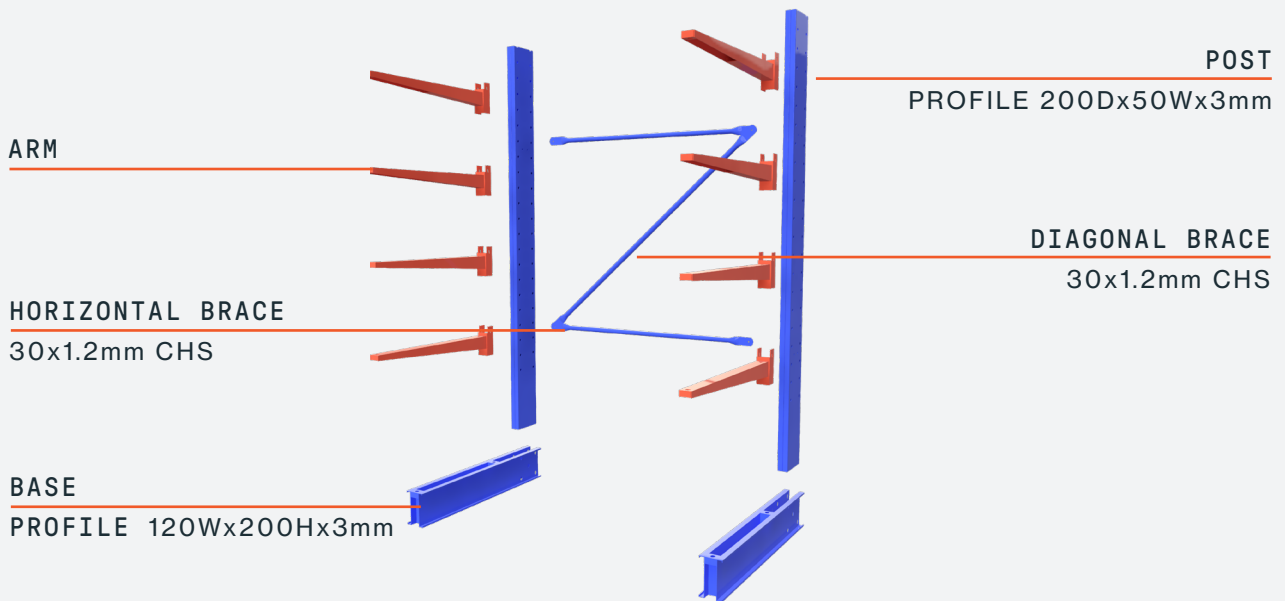

MEASUREMENT KEY

